


Ball Valve Full Port

Model # 60FBA-FWFR (WCB)

Model # 60FBA-FFFR (316SS)

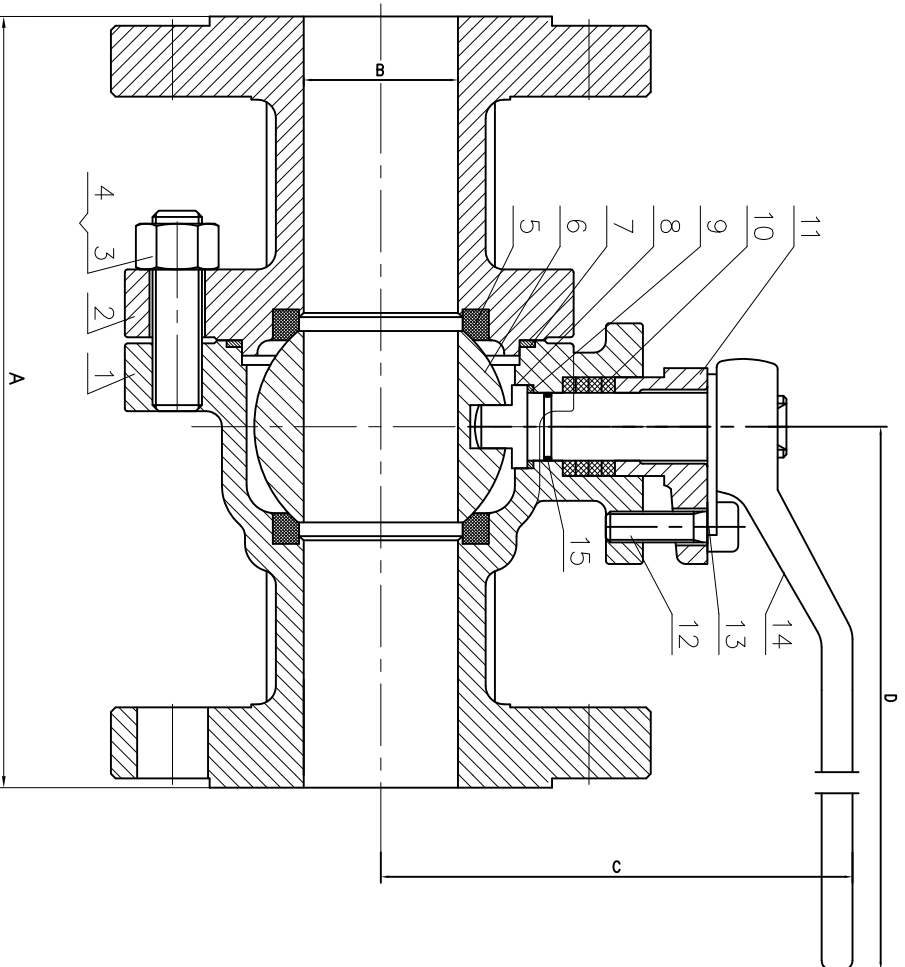

Designed to ASME B16.34/API 608
 Face to Face to ASME/ANSI B16.10
 Flange Dimensions to ASME/ANSI B16.5
 Tested to API 598
 API 607 Fire Safe
 ISO 5211 Mounting Pad

No.	Part	WCB	316SS
1	Body	WCB	CF8M
2	Bonnet	WCB	CF8M
3	Nut	A194 2H	A194 8
4	Stud	A193 B7	A193 B8
5	Seat	RPTEF	RPTEF
6	Ball	316SS	316SS
7	Gasket	PTFE	PTFE
8	Stem	316SS	316SS
9	Thrust Washer	PTFE	PTFE
10	Packing	Graphite	Graphite/PTFE
11	Packing Gland	A216 WCB	A216 WCB
12	Inner Hexagon Screw	A193 B7	A193 B8
13	Stop	CS+Zn	SS
14	Handle	A216 WCB	CF8
15	O-Ring	VITON	VITON

Size in	A	B	C	D	Wt lbs
1	8.5	1.0	3.8	5.9	14
1-1/2	9.5	1.5	5.3	8.7	31
2	11.5	2.0	5.3	11.0	44
2-1/2	13.0	2.5	6.9	11.0	82
3	14.0	3.0	7.9	12.6	110
4	17.0	4.0	8.3	12.6	165

Davis Valve

Rev 2020