

# CAST IRON FLANGED LUBRICATED PLUG VALVE 2"


Pressure Balanced Lubricated Plug Valve

Technical Requirements:


125#

MODEL# 12FPLZ-PB

Design & Manufacture	API 6D
Material Press-Temp Rating	ASME/ANSI 16.34
End to End Dimension	API 6D/ASME B16.10
Flange Dimension	ASME/ANSI B16.5
Test & Inspect	API 598

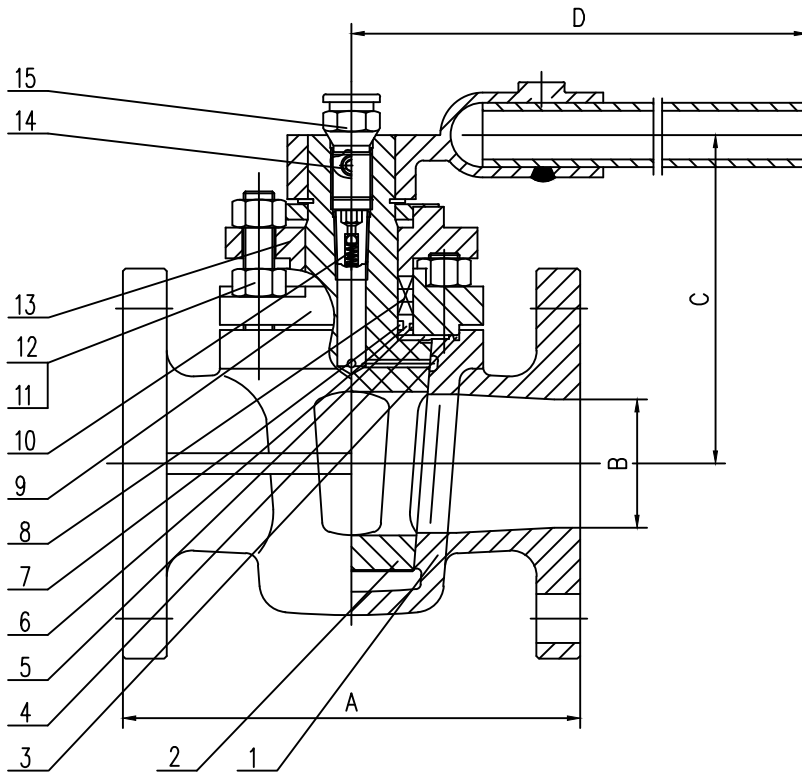

No.	Part	Material
1	Body	A126 B Cast Iron
2	Plug	A126 B CI+ENP
3	Gasket	Flexible Graphite
4	Gasket	PTFE
5	O-Ring	Viton
6	Seat Ring	AISI 1035
7	O-Ring	Viton
8	Braid Packing	Flexible Graphite+PTFE
9	Bonnet	AISI 1035
10	Check Valves	CS/SS
11	Bolt	A307 B
12	Nut	A563 A
13	Gland	AISI 1035
14	Bolt	ISO CL 8.8
15	Grease Fitting	CS/SS



Size in	A	B	C	D	Wt lbs
2	7.0	2.0	5.0	13.8	24

 Davis Valve