
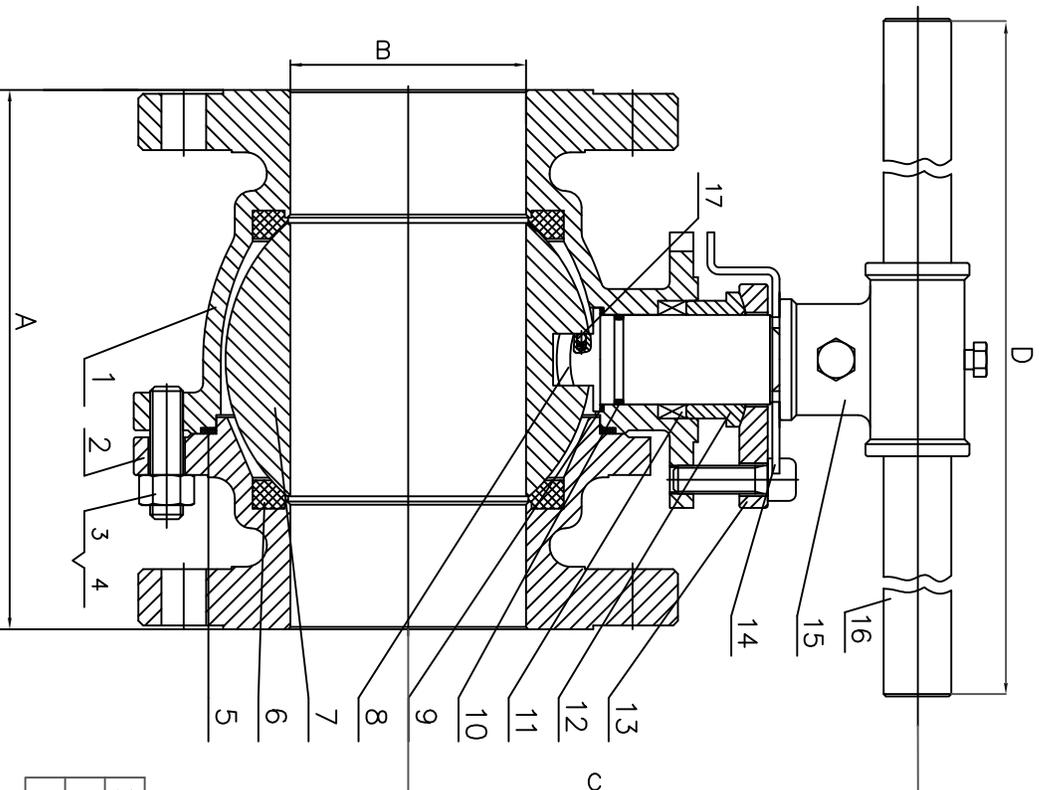


# Ball Valve Full Port

**Model # 15FBA-FWFR (WCB)**

**Model # 15FBA-FFFR (316SS)**

Designed to ASME B16.34/API 608  
 Face to Face to ASME/ANSI B16.10  
 Flange Dimensions to ASME/ANSI B16.5  
 Tested to API 598  
 API 607 Fire Safe  
 ISO 5211 Mounting Pad



No.	Part	WCB	316SS
1	Body	WCB	CF8M
2	Bonnet	WCB	CF8M
3	Stud	A193 B7	A193 B8
4	Nut	A194 2H	A194 8
5	Gasket	316+Graphite	316+Graphite
6	Seat	RPTFE	RPTFE
7	Ball	316SS	316SS
8	Stem	316SS	316SS
9	Thrust Washer	PTFE	PTFE
10	O-Ring	VITON	VITON
11	Packing	Graphite	Graphite/PTFE
12	Packing Gland	316SS	316SS
13	Gland	WCB	CF8M
14	Stop	SS	SS
15	Hub	WCB	CF8
16	Handle	A105	A105
17	Anti static	316	316

Size in	A	B	C	D	E	F	Wt lbs
5	14.0	5.0	8.7	14.2	1.10	.71	99.2
6	15.5	6.0	10.0	31.5	1.42	.94	125.7

**Davis Valve**

Rev 2020